

## DOWN DRAFT

### Version

Worktop 120 cm - Stainless Steel

### Collection

Design+

### EAN code

8034122348582

## KACL.784#46F

Slim motor 600 m<sup>3</sup>/h

### Collection

Accessoires

### EAN code

8034122708218



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

**Scotch brite stainless steel (AISI 304)**

**Perimeter suction**

**Touch control + 24 h function**

**LED lighting**

**Top filter, removable and washable**

**Optional remote control**

Panoramic hobs are recommended with this hood.

## OPTIONAL ACCESSORIES

### KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

## TECHNICAL FEATURES

### Installation type

Worktop

### Dimensions

120 cm

### Finishing

Scotch brite stainless steel (AISI 304)

### Type of control

Touch control

### Speed settings

4

### Lighting

Led stripe

### Ambient lighting

Led strip

### Filter

Metallic filter "Top" - 404x216 mm - 2 pz

## PACKAGING: WEIGHTS AND VOLUMES

### DOWN DRAFT

Worktop 120 cm - Stainless Steel

### Gross weight

54 kg

### Net weight

41 kg

### Volume

0,39 m<sup>3</sup>

### Packaging size

Length

1295 mm

Height

810 mm

Depth

370 mm

### REMOTE MOTOR

Slim motor 600 m<sup>3</sup>/h

### Gross weight

10 kg

### Net weight

9 kg

### Volumes

0,07 m<sup>3</sup>

### Packaging size

Length

515 mm

Height

440 mm

Depth

320 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

190 W

### Current

220-240V

### Frequency

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

560 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise

66 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)

480 Pa

### Maximum power motor

190 W

### ENERGY CLASS

B

## DOWN DRAFT

## KACL.784#46F

Slim motor 600 m<sup>3</sup>/h

### Version

Worktop 120 cm - Stainless Steel

### Collection

Accessoires

### Collection

Design+

### EAN code

8034122708218

### EAN code

8034122348582

## MOTOR TECHNICAL SHEET

Speed motor	1	2	3	4
Noise dB(A)re1pW-I.E.C.60704-2-13	50	55	60	66
Capacity (m3/h) I.E.C.61591 Tubazioni normalizzate	260	330	420	560
Maximum pressure (Pa)	390	430	450	480
Power motor (W)	150	168	180	190
Air outlet		0		

## DOWN DRAFT

**KACL.784#46F**

Slim motor 600 m<sup>3</sup>/h

## Version

Worktop 120 cm - Stainless Steel

## Collection

Accessoires

## Collection

Design+


## EAN code

8034122708218

## EAN code

8034122348582

## ENERGY LABEL

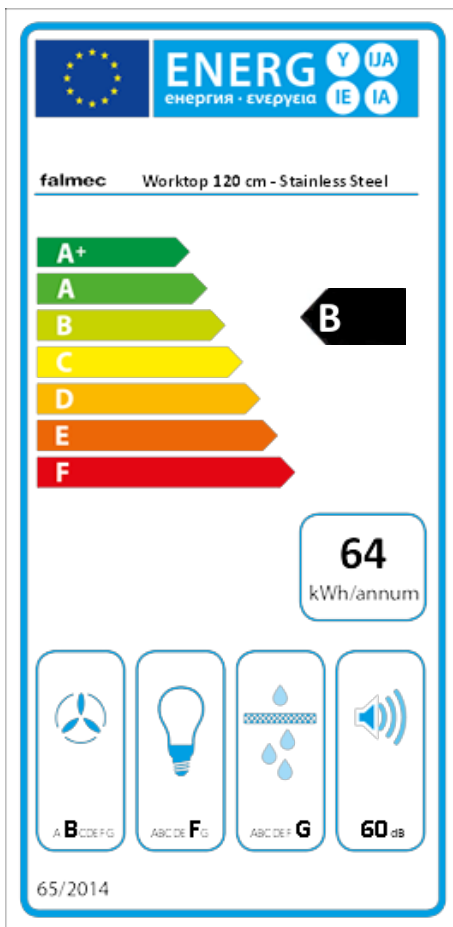

PF		
<b>S</b>	Falmec Spa	
<b>M</b>	Worktop 120 cm - Stainless Steel	
<b>AEC</b>	63,9	kWh/a
<b>ECC</b>	B	
<b>FDE</b>	20,9	
<b>FDEC</b>	B	
<b>LE</b>	6,5	
<b>LEC</b>	F	
<b>GFE</b>	36,0	
<b>GFEC</b>	G	
<b>Qmin</b>	260,0	m <sup>3</sup> /h
<b>Qmax</b>	420,0	m <sup>3</sup> /h
<b>Qboost</b>	560,0	m <sup>3</sup> /h
<b>SPEmin</b>	50	dBa
<b>SPEmax</b>	60	dBa
<b>SPEboost</b>	66	dBa
<b>PO</b>	-	W
<b>PS</b>	0,95	W
PI		
<b>F</b>	1,2	
<b>EEl</b>	68,6	
<b>Qbep</b>	289,0	m <sup>3</sup> /h
<b>Pbep</b>	351	Pa
<b>Qboost</b>	560,0	m <sup>3</sup> /h
<b>Wbep</b>	135,0	W
<b>WL</b>	6,50	W
<b>Emiddle</b>	42	lux
<b>Lwa-SPEmax</b>	60	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.