

GINEVRA BOSTON

Version

Wall 90 cm - Anthracite - 600 m³/h

Collection

Classic

EAN code

8034122409948



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Painted anthracite steel
Copper-covered frontal edge
Slider
Incandescent light
Metallic grease filter, removable and washable
Charcoal filter included

TECHNICAL FEATURES

Installation type
Wall

Dimensions
90 cm

Finishing
Painted anthracite steel
Copper-covered frontal edge

Motor
600 m³/h

Type of control
Slider

Lighting
Incandescent 2x18 W

Filter
Metallic filter "Base" - 235x245 mm - 2 pz

Charcoal filter
Round charcoal filter Ø212 mm - Type 2 - included

Minimum distance
Gas hob: 65 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
22.00 kg

Net weight
18.00 kg

Volume
0.37 m³

Packaging size
Length
995 mm
Height
595 mm
Depth
630 mm

MOTOR TECHNICAL SHEET

Maximum capacity
480 m³/h
I.E.C. 61591

Maximum noise level
65 dB(A)re1pW
I.E.C.60704-2-13

Maximum pressure (Pa)
500 Pa

Max. motor power
180 W

ENERGY CLASS
C


CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
230 W

Voltage / Frequency
220-240V

50-60Hz

Plug type
Shuko



GINEVRA BOSTON

Version

Wall 90 cm - Anthracite - 600
m³/h

Collection

Classic

EAN code

8034122409948

MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	58	65
Capacity (m3/h) I.E.C.61591 Normalized Pipes	220	320	480
Maximum pressure (Pa)	270	400	500
Motor Power (W)	100	130	180
Air outlet	120	120	120

GINEVRA BOSTON

Version

Wall 90 cm - Anthracite - 600 m³/h


Collection

Classic

EAN code

8034122409948

ENERGY LABEL

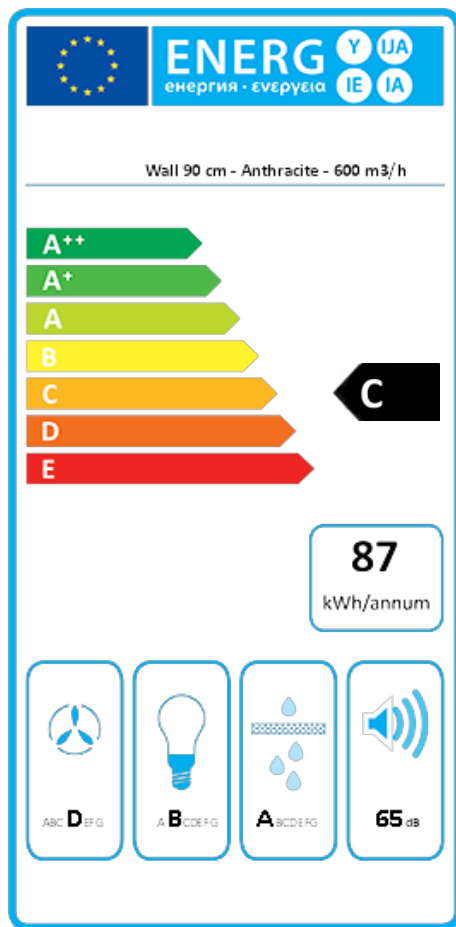

PF		
S	Falmec Spa	
M	Wall 90 cm - Anthracite - 600 m ³ /h	
AEC	87,1	kWh/a
ECC	C	
FDE	15,8	
FDEC	D	
LE	25,5	
LEC	B	
GFE	96,0	
GFEC	A	
Qmin	220,0	m ³ /h
Qmax	480,0	m ³ /h
Qboost	480,0	m ³ /h
SPEmin	49	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,00	W
PI		
F	1,4	
EEl	80,6	
Qbep	303,0	m ³ /h
Pbep	308	Pa
Qboost	480,0	m ³ /h
Wbep	164,0	W
WL	4,50	W
Emiddle	121	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.