

## VIRGOLA TOUCH

### Version

Built-in - 60 cm - Black - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122367446



Photograph is for information purposes only  
It may not correspond to the selected version.

## FEATURES

**Glass panel**  
**Touch control**  
**Metallic grease filter, removable and washable**  
**Combined regenerable Carbon.Zeo filter (optional)**  
**Dimmable lighting**  
**Dynamic Light (2700K - 5600K)**

Dynamic and dimmable Led from 06.21.24

## OPTIONAL ACCESSORIES

### KACL.1039

Carbon.Zeo Microtech filter

### KACL.106

Glass shelf 60 cm

### KCVJN.00#N

Telescopic chimney h 185 + h 185 - Black

### KCVJN.01#N

Chimney h 120 mm - Black

## TECHNICAL FEATURES

### Installation type

Built-in

### Dimensions

60 cm

### Finishing

Painted black steel

### Motor

800 m<sup>3</sup>/h

### Type of control

Touch control

### Speed

3 + boost

### Lighting

Strip Led 3,5 W - 2700 K / 5600 K

K

### Minimum distance

Gas hob: 52 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

13.3 kg

### Net weight

10.4 kg

### Volumes

0.13 m<sup>3</sup>

### Packaging size

Length

705 mm

Height

410 mm

Depth

465 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage



220-240V

### Frequency

50-60Hz

### ENERGY CLASS

A



## VIRGOLA TOUCH

### Version

Built-in - 60 cm - Black - 800 m3/h


### Collection

Design

### EAN code

8034122367446

## ENERGY LABEL

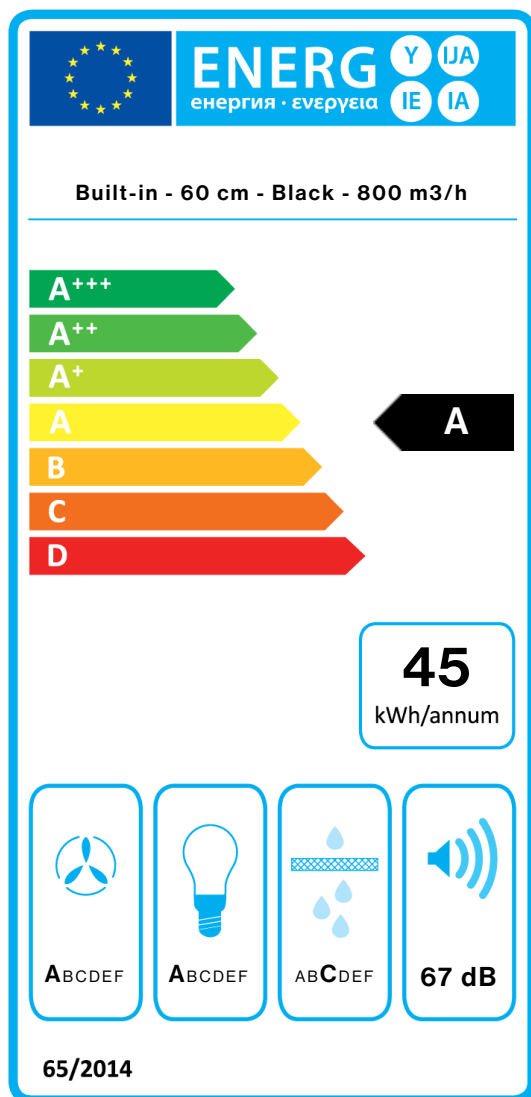

PF		
S	Falmec Spa	
M	Built-in - 60 cm - Black - 800 m3/h	
AEC	45,3	kWh/a
EEC	A	
FDE	29,8	
FDEC	A	
LE	44,0	
LEC	A	
GFE	84,0	
GFEC	C	
Qmin	300,0	m <sup>3</sup> /h
Qmax	570,0	m <sup>3</sup> /h
Qboost	661,0	m <sup>3</sup> /h
SPEmin	51	dBa
SPEmax	67	dBa
SPEboost	71	dBa
PO	-	W
PS	0,28	W
PI		
F	0.9	
EEL	51,1	
Qbep	389,0	m <sup>3</sup> /h
Pbep	359	Pa
Qboost	661,0	m <sup>3</sup> /h
Wbep	130,0	W
WL	3,50	W
Emiddle	154	lux
Lwa-SPEmax	67	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.