

EUROPA 175 BLACK

Version

Island - 175 cm - Black - 800 m3/h

Designer

Collection

Design

EAN code

8034122365688

FEATURES

- Perimeter suction
- Electronic control
- Metallic grease filter, removable and washable
- Remote control (optional)
- Dimmable lighting
- Dynamic Light (2700K - 5600K)
- Dialogue system with auto mode
- Carbon.Zeo Microtech filter (optional)

Availability Carbon.Zeo filter
KACL.1039 for hoods produced from Sept. 2024

OPTIONAL ACCESSORIES

KACL.1027#HF

Extension kit h125 cm

KACL.1039

Carbon.Zeo Microtech filter

KACL.557#N


Extension H1200 Island - Black

KACL.866

Air flow conveyer for re-circulation versions (Island)

105080053

Remote control



Photograph is for information purposes only
It may not correspond to the selected version.

TECHNICAL FEATURES

- Installation type
Island
- Dimensions
175 cm
- Finishing
Black matte
- Motor
800 m³/h
- Type of control
Electronic control
- Speed
3 + boost
- Lighting
Led 4x1,2 W - 2700 K / 5600 K
- Minimum distance
Gas hob: 63 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

- Gross weight
78.9 kg
- Net weight
67 kg
- Volumes
0.71 m³
- Packaging size
Length
1905 mm
Height
515 mm
Depth
725 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption
280 W
- Voltage
220-240V
- Frequency
50-60Hz
- Plug type
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity
680 m³/h
I.E.C. 61591
- Maximum noise level
68 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)
500 Pa
- Max. motor power
215 W
- ENERGY CLASS
B

EUROPA 175 BLACK

Version
Island - 175 cm - Black - 800
m3/h

Designer


Collection
Design

EAN code
8034122365688

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A) _{re1pW-I.E.C.60704-2-13}	49	56	62	68
Capacity (m3/h) I.E.C.61591	280	370	480	680
Maximum pressure (Pa)	390	420	480	500
Power (W)	132	153	175	215
Air outlet	150	150	150	150

CAPACITY / PRESSURE

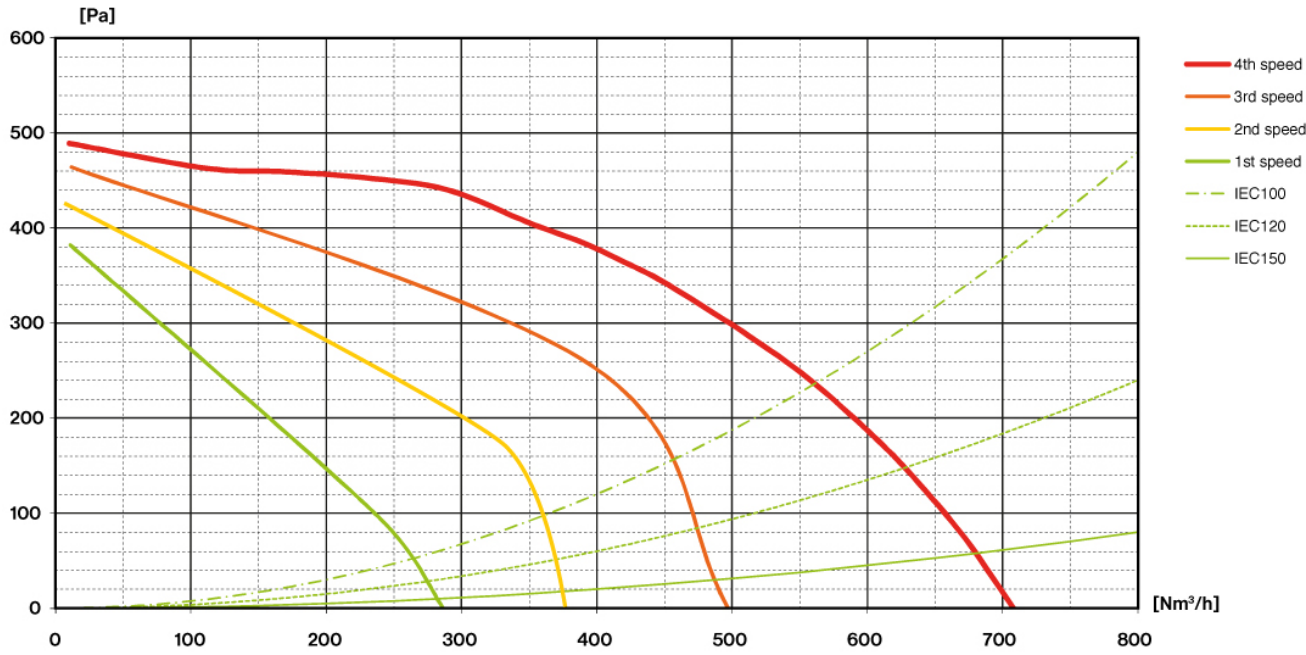

EUROPA 175 BLACK


Version
Island - 175 cm - Black - 800 m3/h

Designer

Collection
Design

EAN code
8034122365688

ENERGY LABEL

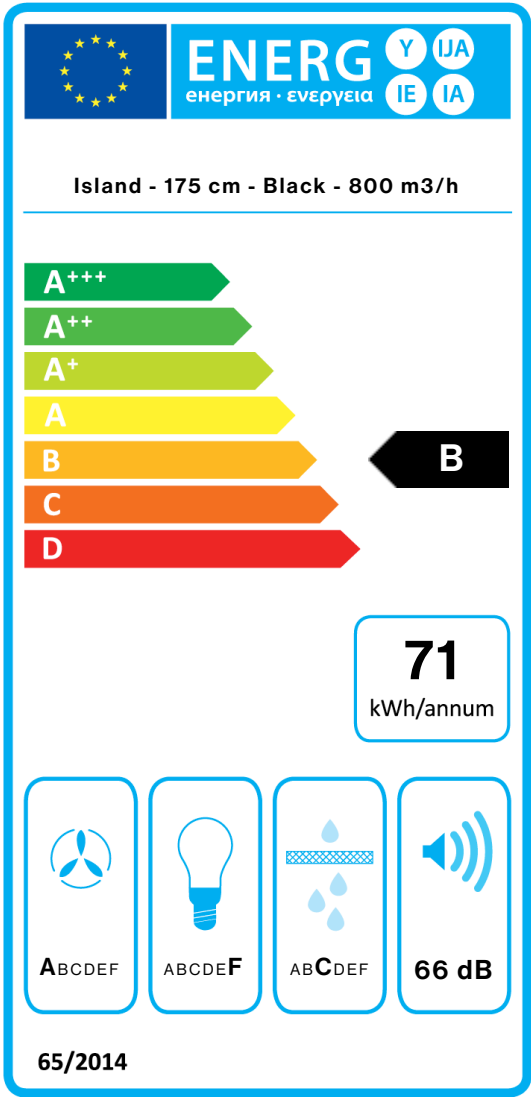

PF		
S	Falmec Spa	
M	Island - 175 cm - Black - 800 m3/h	
AEC	71,2	kWh/a
EEC	B	
FDE	29,2	
FDEC	A	
LE	7,3	
LEC	F	
GFE	80,0	
GFEC	C	
Qmin	313,0	m³/h
Qmax	573,0	m³/h
Qboost	641,0	m³/h
SPEmin	51	dBa
SPEmax	66	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEl	65,7	
Qbep	366,0	m³/h
Pbep	373	Pa
Qboost	641,0	m³/h
Wbep	130,0	W
WL	39,00	W
Emiddle	285	lux
Lwa-SPEmax	66	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.